

13. 09. 2004

**Europäisches  
Patentamt****European  
Patent Office****Office européen  
des brevets****BEST AVAILABLE COPY****Bescheinigung****Certificate****Attestation**


Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

**Patentanmeldung Nr.    Patent application No.    Demande de brevet n°**

03447177.1

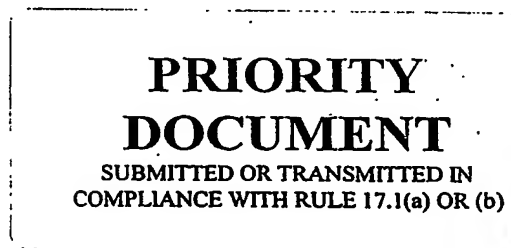

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

**R C van Dijk**



Anmeldung Nr:  
Application no.: 03447177.1  
Demande no:

Anmeldetag:  
Date of filing: 30.06.03  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Thomson Multimedia Broadband Belgium  
Prins Boudewijnlaan 47  
2650 Edegem  
BELGIQUE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

Network equipment and a method for monitoring the start up of a such an equipment

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

G06F9/40

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL  
PT RO SE SI SK TR LI

The present invention relates to a network equipment and to a method for monitoring the software start up of a such an equipment.

Stand-alone networking equipment, such as a DSL modem, a bridge or a router or a combination thereof, is used for example to interface a local area  
5 network with an access network such as the Internet.

Commonly, stand alone equipment comprise a persistent memory, also called on board memory means, such as a read only memory (ROM) and/or an electrically erasable programmable read only memory (EEPROM). This memory contains among others, data and software necessary to initiate the start up and  
10 run the equipment such as equipment configuration parameters, boot software and firmware.

To secure their start up, some stand alone equipments contain two copies of some of the items mentioned above i.e. the equipment configuration, the boot software and the firmware. But, some modems may have a persistent  
15 memory just large enough to contain a single copy of these data.

In that case, if these data are corrupted, the equipment ceases functioning properly until the persistent memory recovers a new valid firmware or configuration or boot program.

This situation might occur, for example, when the modem downloads  
20 upgraded software from an appropriate server. As the persistent memory can hold only one copy of the software, the old software is erased before the updated one is fully recorded. If the connection is cut off or if the equipment is powered down during the download, the software is corrupted.

It may also happen that the equipment comes to a halt during the  
25 power up phase or reboots automatically because of a software or hardware default.

In such cases, the equipment usually ceases functioning properly and notifies the problem status to the end user by means of a LED indicator.

It is known, for example from US 6,526,092, to allow a modem to  
30 download updated operating code over a phone line to a host personal computer and reprogramming the modem's memory over a serial port from the host personal computer. This process is under user control.

The present invention proposes a network equipment for connection to a local network comprising a persistent memory for storing software, characterized in that it further comprises :

- communication means for connection through said network to a software server,
- means for monitoring the start up of the equipment in order to detect a software failure,
- means for generating a software failure signal in response to the detection of a failure by the monitoring means, and for automatically sending a notification of the failure to the server through the network.

Thus, the user need not intervene in the failure correction process, unless the server decides this is required. Preferably, the server comprises an application for analysing the failure type and for automatically taking corrective actions.

- In particular, according to a preferred embodiment of the invention, when the failure is a software start up failure, the means for generating a failure signal are adapted to requesting the automatic download of replacement software in the memory means from the software server.

Thus, this embodiment's persistent memory needs to hold only one software copy and has the same level of robustness as an equipment holding two copies of the software or data.

Advantageously, the software download is done without any delay.

The present invention also proposes a process for monitoring the software start up of a network equipment, the equipment comprising a persistent memory for storing software and communication means for connection through the network to a software server, this process comprising the steps of:

- monitoring the software start up of the equipment in order to detect a software start up failure,
- generating a software start up failure signal in response to the detection of a start up software failure,
- automatically notifying the software failure signal to the server through the network.

The teaching of the present invention can be readily understood by considering the following detailed but non-restricting description of an embodiment of the invention, together with the drawings, wherein :

- Figure 1 shows a block diagram of a system encompassing the  
5 network equipment according to the present embodiment;

- Figure 2 depicts schematically a flow diagram of a processing method suitable for use in the system of figure 1 and in accordance with the principles of the present embodiment; and

- Figure 3 depicts schematically a flow diagram of the method  
10 illustrated in figure 2 with more details.

Figure 1 shows a block diagram of a system incorporating a stand-alone equipment 1 according to the present invention.

This network equipment 1 consists in any device able to process data transfer communication. It can be, for example, a DSL type modem or another  
15 stand-alone networking equipment. The equipment is connected to a local area network 2, to which is also connected a server 3 and/or a device with a failure processing application (not shown).

The network equipment 1 is provided with persistent on board memory means 4 such as an Electrically Erasable Programmable Read Only Memory  
20 (EEPROM). This persistent memory holds a plurality of items. According to the present embodiment, it stores among others data and software programs necessary for the start up and functioning of the equipment: e.g. equipment configuration parameters 5, a boot software 6 and a firmware 7.

The equipment configuration 5 is a set of parameters containing among  
25 others the serial number and the network address of the modem.

Firmware 7 consists in any software written in a memory that is not erasable by an application level software, i.e. which has a certain protection. In the present embodiment, firmware comprises e.g. the modem's operating system. Although in what follows, the firmware may be replace globally by a download,  
30 the firmware may comprise distinct items, and the invention is not limited to a bulk download but also extends to testing and downloading separate items.

As a matter of fact, the stand-alone equipment 1 comprises also a data processing unit such as a microprocessor running the different programs and a non-persistent memory, not represented for clarity reason. Prior to execution,

software stored in the persistent memory is copied to the non-persistent memory (e.g. RAM).

The stand-alone equipment comprises also a data transfer module 8 between the on board memory means 4 and network communication means 9  
5 connected to the network 2.

This transfer module 8 can employ for example the standardized Bootstrap protocol (BOOTP), and the file transfer protocol (TFTP) to exchange information between the server 3 and the equipment 1 via the local area network 2. The equipment being a DSL modem according to the present embodiment, it  
10 also comprises a corresponding PSTN interface and associated circuitry to carry out its DSL functionalities. These items are well known in themselves and not represented in figure 1.

Modules 8 and 10 may either be hardware implemented or be software modules run by the microprocessor from the non-persistent memory.

15 According to this invention, the stand-alone equipment 1 comprises also monitoring means 10 able to control the start up of the software of the equipment.

These monitoring means 10 check, among other things, validity, presence and correct start up of the firmware 7 and the validity of the  
20 configuration data 5. Checking of the boot software copy in persistent memory is also possible, but will not be discussed in more detail.

In case of any problem during in particular the start up process, these monitoring means 10 generate a firmware start up failure signal which is transmitted by the transfer module 8 and the communication means 9 through the  
25 data transfer network 2 to the software server 3.

This failure signal, notified to the software server 3, is associated to a BOOTP request of downloading of replacement firmware by the server. A frame portion of the BOOTP protocol used for sending this failure signal, specifies the kind of software to be downloaded or the appropriate failure signal. This frame  
30 portion can be, for instance, the "vendor specific optional field" of the BOOTP protocol.

It is assumed that an application in the data transfer network 2, illustratively the software server 3, maintains a data base wherein program codes and replacement software and/or configuration data are stored.

In response to this BOOTP request, this server 3 transmits replacement software to the network equipment, through the network 2, using the TFTP protocol of the transfer module 8 and the communication means 9.

In practice, the BOOTP message comprises a number of failure states  
5 of the equipment, following the process detailed below. Another device on the local area network will interpret these states and decide on a corrective action, typically including a replacement software download, but may also include notifying failure information to a user.

Advantageously, the monitoring means 8 can also be associated to a  
10 button 11 which can be operated manually by the user to trigger the request of a firmware and/or boot software download over the network.

Preferably, a visual or a sounding alarm 12 is connected to the monitoring means 10 for notifying a start up failure to the user.

Figure 2 shows a flow diagram which illustrates a simplified version of  
15 the start up process of the stand alone equipment 1 according to the present embodiment. The shown steps relate mainly to testing the validity and presence a software like for example a firmware in memory 4.

At the time of the power on (step 20) of the stand-alone equipment 1, monitoring means 10 launch a firmware testing step 21 concerning the firmware  
20 necessary to start up the equipment 1. If no problem is detected during this testing step, monitoring means 10 check, in step 22, if the firmware is stored in the on board memory means 4.

If the firmware is missing, the monitoring means 10 generate a software start up failure signal F, and reboot the equipment 1.

25 At step 23, if the testing step 21 is not successfully performed, the monitoring means 10 request the downloading of a replacement firmware from the software server 3 through the transfer network 2 by using the BOOTP protocol of the transfer module 8 and the communication means 9.

At step 24, the software server 3 downloads a replacement firmware  
30 through the transfer network 2 by using the TFTP protocol of the transfer module 8 and the communication means 9.

At step 25, the monitoring means 10 control the correctness of the downloading. When, for example the downloading has been interrupted, the monitoring means 10 generate a specific firmware failure signal F (comprising the

identification of the failure type), and reboot the equipment 1 so that a new download may be initiated.

If the tests are correctly performed, the monitoring means 10 load, during step 26, the firmware and set a start up failure flag and a timer to  
5 determine a start up time limit. The flag is reset by the firmware if it performs its start up properly. If the software start up is not completed once the start up time limit is reached, the flag is still set, and the monitoring means 10 generate a software start up failure signal F (also comprising an identification of the failure type, different from the first failure type above), and reboot the equipment 1.  
10 Otherwise, at step 27, when the software start up is properly executed it resets the software start up flag and no failure signal is generated.

Advantageously, according to the embodiment, the network equipment 1 provides an automatic request and an automatic downloading of a replacement software in case of firmware start up failure or absence of firmware. Thus, e.g.  
15 start up failures are repaired automatically and the user does not even notice the existence of a failure.

Specifically, the block diagram of figure 3 shows the details of the start up process of the stand alone equipment according to the embodiment.

The process begins at step 30, when a power on condition is initiated  
20 for the network equipment. The process of figure 3 is then executed by the monitoring means 10, using the well known BOOTP and TFTP protocols.

At step 31, initial tests are executed. Typically, the monitoring means 10 check the availability of the persistent memory 4 and the proper operation of the non persistent memory.

25 At step 32, advantageously and in accordance with the present invention, a determination is made as to whether there is an equipment configuration failure or whether the end user has pressed the activation button 11 to request a software downloading.

If one of these situations occurs, monitoring means 10 jump in step 33,  
30 and control the validity of the configuration data stored in the on board memory means 4.

Equipment configurations 5 are often secured by a signature or a checksum. This signature or checksum is registered in the on board memory means 4 of the equipment 1. A classical and easy way to control the validity of an



equipment configuration consists in recalculating its checksum and comparing it to the registered one. If there is a mismatch, the equipment configuration 5 is no more valid. In that case, the monitoring means 10 set up a corresponding failure flag 34.

5           Advantageously, this flag 34 is encoded to deliver information about the type of failures encountered. In the above mentioned case, the failure flag 34 comprises an information status indicating the presence of an equipment configuration failure.

10           Depending on the type of configuration data, the configuration data failure may or may not be correctable through a download. In the latter case, the BOOTP message issued by the equipment is interpreted by other network devices as indicating that the equipment cannot be used any more and is to be considered as dead.

15           If the configuration is valid in step 33, that means that the end user has pressed the button 11 to trigger the download of firmware. Thus, the monitoring means 10 set also a software start up failure flag 35. This failure flag 35 specifies that the user has requested a firmware download.

20           If no downloading has been requested and in the absence of an equipment configuration's problem, the monitoring means 10 check, after step 32, the validity of the firmware program 7 registered in the on board memory means 4 during step 36.

25           A simple way to do that consists in controlling the presence and the validity of its verification pattern (FVP for Flash Verification Pattern). The verification pattern is a classical tool for checking the integrity of software or data. When the firmware is successfully recorded in the persistent memory 4 a verification pattern is calculated and also written into memory 4. Should the equipment suffer a power failure or another problem during the storage of the firmware, the verification pattern corresponding to this firmware is either not stored or wrong.

30           Therefore, at step 36, the monitoring means 10 check the validity of the firmware with the help of the firmware verification pattern. If the pattern is not valid, then a failure flag 37 is set. As for the other testing steps, this particular failure flag indicates the nature of the failure.

At step 38, the monitoring means 10 check the setting of the failure flags 34, 35, 37. If at least one flag is set, the monitoring means 10 will automatically send a failure signal to the server 3 through the transfer network 2 using the BOOTP protocol of the transfer module 8 and the communication means 9. This message contains the failure flag state.

Applications bundled with network devices, such as an application of the software server 3, listen for these signals and interpret the failure status information. After interpretation of this information, these applications decide, preferably without any end user intervention, on an action comprising at least one of starting a firmware download to the network equipment 1 and/or notifying the problem to the user. e.g. in case of occurrence of a fatal configuration failure, the user is notified since no correction of the failure may be possible. The user may also be notified if a download is not performed correctly after a certain number of retries. A counter of tries may be implemented for this purpose and increment appropriately after each BOOTP message requesting e.g. a firmware download.

Specifically, the transfer module 8 indicates the problem status in the "vendor optional specific field" of an appropriate BOOTP protocol message sent on the network by the monitoring means 10. This field is of standard use to communicate to an application certain restrictions or additional client information.

After its downloading, the replacement software is stored in the persistent on board memory means 4. This step has reference 39.

At step 40, the monitoring means 10 control that the replacement software has been downloaded without any interruption and that it has been correctly recorded.

When the software downloaded is a firmware, the data processing unit checks the replacement firmware and calculates its flash verification pattern (FVP) and records it in the memory 4 at step 41.

If the replacement software is damaged or incorrectly downloaded or recorded, the monitoring means 10 sets a corresponding failure flag 42. Then, the stand alone equipment 1 is rebooted. Of course, the flags are stored in such a way as to be unaffected by the rebooting process. At step 31, the device tests whether flag 42 is set and sends a corresponding BOOTP message to request a firmware download.

At step 43, if no failure flag has been detected at step 38, the monitoring means 10 control the presence of the firmware in the on board memory means 4. There are different methods available for checking this presence. For instance, the firmware's presence can be checked with the  
5 detection of a specified identification code in a fixed location of the firmware code. Other methods can also be used in accordance with this invention.

If no software is registered, the monitoring means 10 set a failure flag 44 and the modem is rebooted at step 30 to process the failure based on the set flag as above.

10 If step 41 or step 43 are executed without any problem, the monitoring means 10 set a start up flag and trigger a start timer, at step 45, before loading and starting the firmware at step 46.

After a successful start up, the start up flag is reset by the firmware, confirming that it started properly. However, if the start up is not performed before  
15 the start time has elapsed, the monitoring means 10 set a problem flag 48 and reboot the equipment at step 30 to process the corresponding failure.

To summarize, the process of figure 3 defines five problem states :

- software (firmware) start-up error: the firmware either halts during start-up or reboots without correctly starting up;
- 20 - invalid configuration ;
- failed software (firmware) download (e.g; interruption of download process) ;
- absence of software ;
- writing of downloaded software to persistent memory failed  
25 verification pattern incorrect).

Other states may trigger a download of software :

- a mechanical button of the device was pressed by the user to request a firmware download ;
- the firmware received a request over the network to perform a  
30 firmware update.

Flags are checked by the monitoring means either at the beginning of the boot process, or during its execution. A download can be requested explicitly, or the decision as to a download should be left to an application listening to the device's messages.

This invention is not restricted to the preferred embodiment herewith disclosed. In particular, any kind of software or data can be downloaded. And this process can also be performed with protocols differing from the TFTP and BOOTP protocols.

**CLAIMS**

1. Network equipment for connection to a local network comprising a persistent memory (4) for storing software (5, 6, 7), characterized in that it comprises :

- 5           - communication means (8, 9) for connection through said network to a software server (3),
- means (10) for monitoring the start up of the equipment in order to detect a software failure,
- means (10) for generating a software failure signal in response to  
10 the detection of a failure by the monitoring means, and for automatically sending a notification of the failure to the server through the network.

2. Equipment according to claim 1, characterized in that the failure signal comprises information specifying at least one of the following :

- the nature of the failure,
- 15           - an identification of replacement software to be downloaded.

3. Equipment according to any one of the preceding claims, characterized in that the software comprises at least one of the following :

- a boot program (6),
- configuration data (5),
- 20           - firmware (7).

4. Equipment according to claim 3, characterized in that, the software comprising firmware, the means (10) for monitoring the start up comprise:

- means (10) for checking (36) the validity of a current firmware verification pattern and,
- 25           - means (10) for generating (39) a specific software start up failure signal (37) when this verification pattern is not valid.

5. Equipment according to claim 1, characterized in that the means (10) for monitoring the start up comprise:

- means for calculating (33) the checksum of the current software,
- 30           - means for comparing (33) this calculated checksum to a previously stored check sum,
- means for generating (39) the software start up failure signal (34) when this calculated check sum is not identical to the stored one.

6. Equipment according to claim 3, characterized in that, said memory comprising firmware, the means (10) for monitoring the start up comprise:

- means for checking (43) the presence of the firmware in the memory means (4),

5       - means for rebooting (30) the stand alone equipment when no firmware is stored in the memory (4),

- means for generating (39) a software start up failure signal (44) when no firmware is stored in the memory means (4).

7. Equipment according to any one of the preceding claims, 10 characterized in that the means (10) for monitoring the start up comprise:

- means for checking (40) the downloading of replacement software in the memory (4),

15       - means for rebooting (30) the equipment and means for generating a software start up failure signal (42) when a problem is detected during this downloading.

8. Equipment according to claims 3 or 4 and 7, characterized in that the software comprises firmware, and the equipment comprises :

20       - means for writing (41) a replacement firmware verification pattern (17) corresponding to the replacement firmware downloaded in the memory (4), when a replacement firmware (7) is properly recorded in this memory.

9. Equipment according to any one of the preceding claims, characterized in that the means (10) for monitoring the start up comprise:

- means for checking (46) the process of loading of a software,

25       - means for rebooting (30) the stand alone equipment and means for generating a software start up failure signal (48) when a problem appears during this loading.

10. Equipment according to any one of the preceding claims, characterized in that the means (10) for monitoring the software start up comprises:

30       - a timer to determine a start up time limit,

- means for launching the software start up (45), said software being adapted to a start up end indication to the monitoring means after completion of the start up;

- means for generating a software start up failure signal (48), if the software start up is not completed before the end of the time limit.

11. Equipment according to any one of the preceding claims, characterized in that it further comprises user actionable means (11) connected to the monitoring means (10) for enabling a user to manually request the download of replacement software.

12. Equipment according to any one of the preceding claims, characterized in that it further comprises an alarm (12) connected to the monitoring means (10) for notifying a start up failure to the user.

13. Equipment according to any one of the preceding claims, characterized in that the means (10) for generating a software start up failure signal comprise:

- means for checking (38) the setting of a failure flag, and
- means for generating (39) the software failure signal and for transmitting it on the network in response to the detection of a set failure flag.

14. Method for monitoring the software start up of a network equipment, the equipment comprising a persistent memory(4) for storing software (5, 6, 7) and communication means (8, 9) for connection through the network (2) to a software server (3), this process comprising the steps of:

- monitoring (32, 33, 36, 38, 40, 43, 46) the software start up of the equipment in order to detect a software start up failure,
- generating a software start up failure signal (34, 35, 37, 42, 44, 48) in response to the detection of a start up software failure,
- automatically notifying (39) the software failure signal to the server (3) through the network (2).

15. Method according to claim 14, wherein the software failure signal comprises a request to the software server (39) for the download of replacement software in the memory (4) .

16. Method according to claim 14, wherein the software failure signal comprises an identification of the failure for analysis by the server.

BET 03P0678

**THOMSON MULTIMEDIA BROADBAND BELGIUM****Network equipment and a method for monitoring  
the start up of a such an equipment.****ABSTRACT**

The invention concerns a network equipment for connection to a local network and a method for monitoring the start up of a such an equipment.

This equipment comprises


- persistent memory (4) for storing software (5, 6, 7), and advantageously also comprises
  - communication means (8, 9) for connection through said network to a software server (3),
  - means (10) for monitoring the start up of the equipment in order to detect a software failure,
  - means (10) for generating a software failure signal in response to the detection of a failure by the monitoring means,
- and for automatically sending a notification of the failure to the server through the network.

Figure 1






2/3

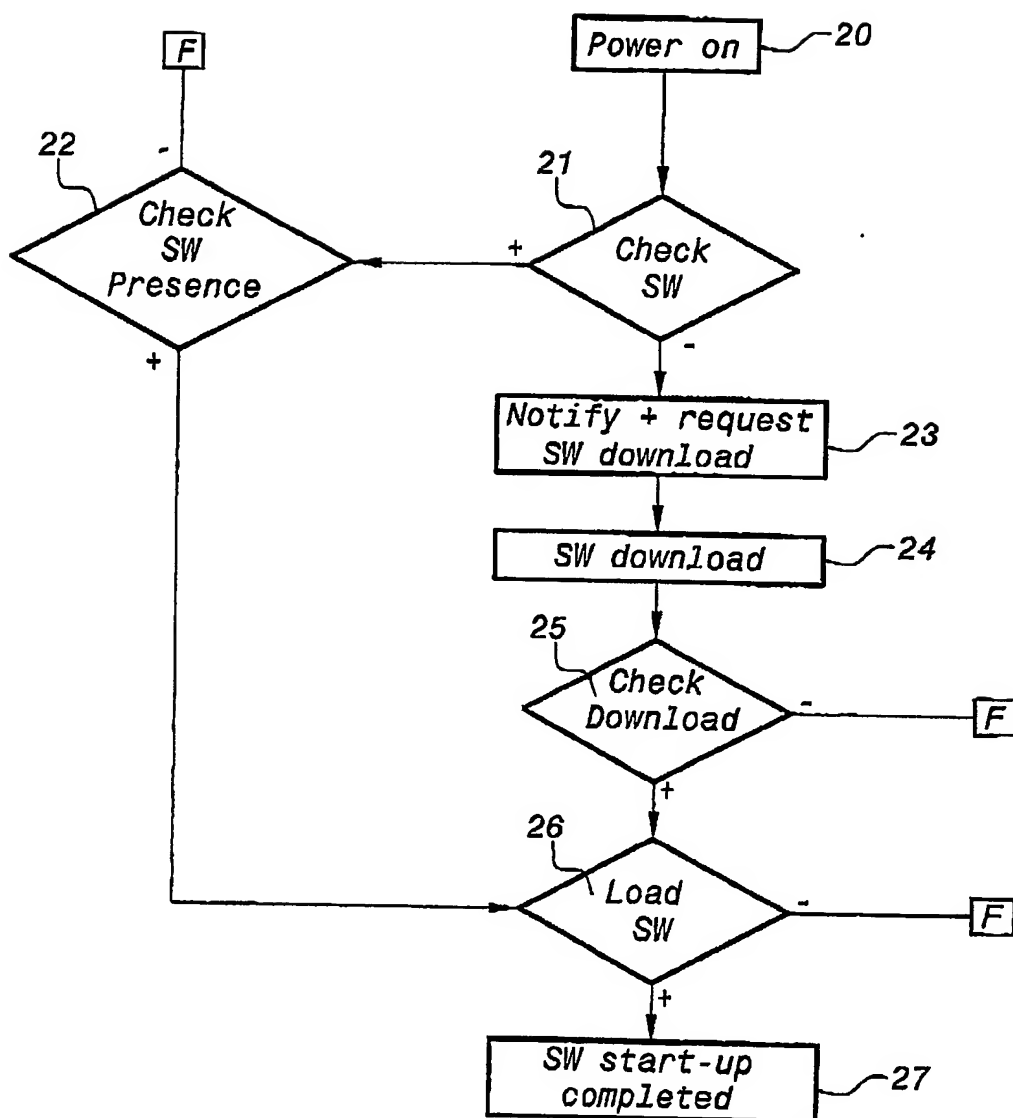

**FIG.2**

3/3

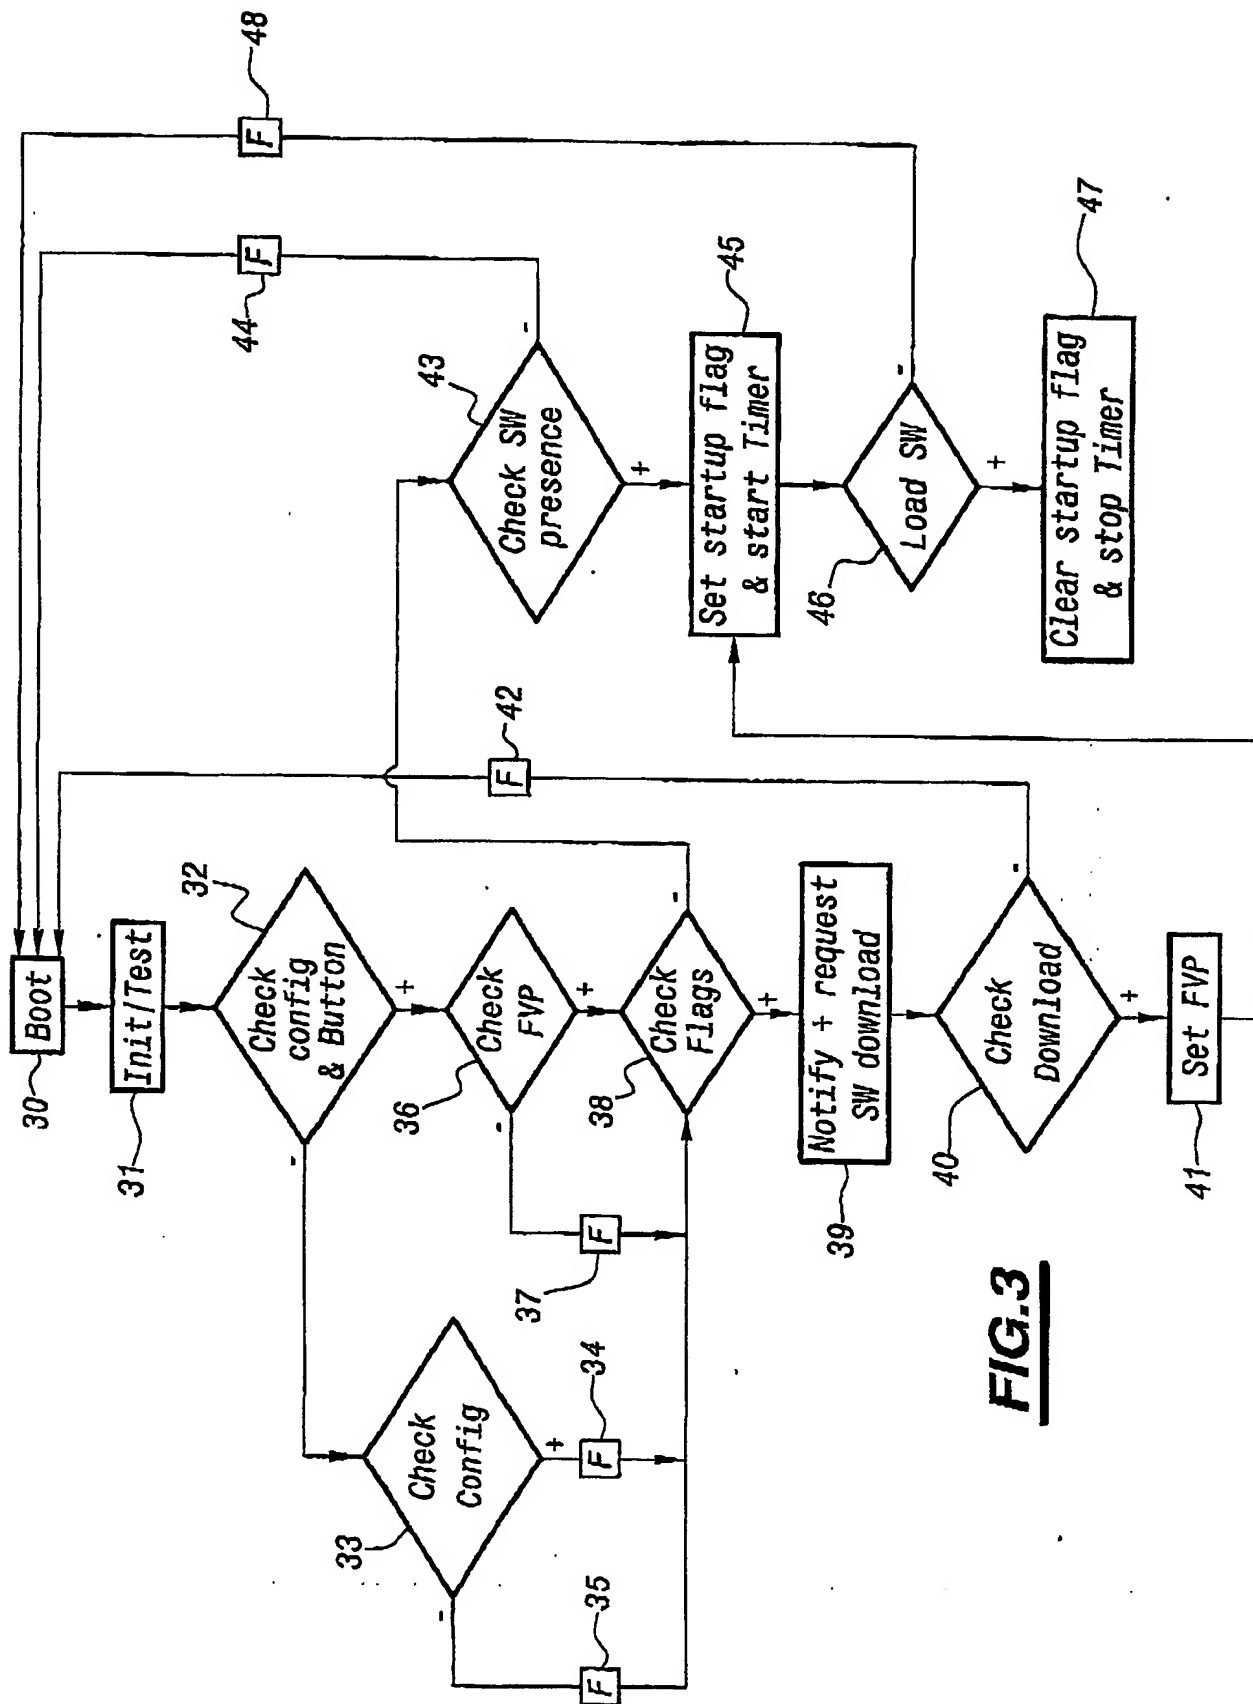

**FIG.3**

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☒ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**